


# TuffTraxx™ Series Cable & Hose Protectors

Portable Power

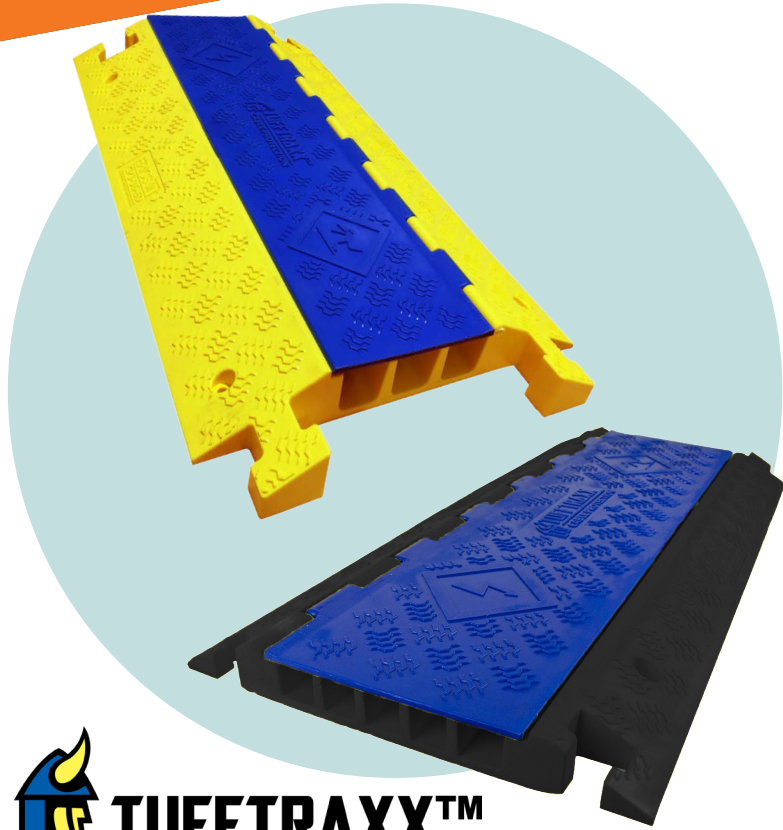

## Industry Leading Features:

- ⊕ Exceeds industry code requirements for Cable & Hose Protection
- ⊕ Crush resistant and UV stabilized polyurethane
- ⊕ Rugged, All-Weather, and Chemical-Resistance
- ⊕ Best-in-class load rating to 50,000 lbs. per axle
  - Slip Resistant channel cover with rugged fiberglass hinge
  - Rounded dividers protect cables from snags
  - Convenient stake-down holes to prevent movement
  - Easy-carry handles on back
- ⊕ TT-Cart for easy jobsite transport
- ⊕ Cover and base available in custom colors and logo

⊕ *Industry Leading, Ericson Exclusive*




## Unique Customization Available

Custom colored base, cover, and logo combinations are available. Contact an Ericson representative.



### Applications:

- Construction Sites
- Oil & Gas Extraction
- Refineries
- Mines
- Utilities
- Transportation
- Food Processing
- Stadiums & Arenas
- Conventions & Fairs
- Rental Services




Custom colors available




Custom logo here


## Unique Features:




T-Style connector interlocks for secure operation

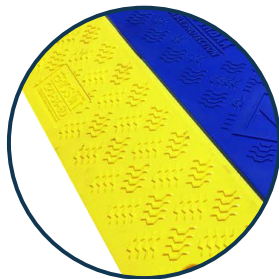


Non-conductive shock barrier protection



Hinged lid for easy cable loading



Channels accommodate a range of cable diameters



Stake down holes for temporary & permanent installation

## Product Descriptions & Specifications

Part Number	Product Description	Maximum Load	Operating Temperature Range	Material: Straight Section Body
CP5-36-ID	36in, 5 channel, yellow base, blue cover	27,000 lbs @ 70°F (9,525 kg. @ 21°C)	-40°F to 120°F (-40°C to 49°C)	UV resistant, stabilized polyurethane
CP3-36-ED	36in, 3 channel, yellow base, blue cover	35,000 lbs @ 70°F (9,525 kg. @ 21°C)		
CP5-36-ED	36in, 5 channel, yellow base, blue cover	50,000 lbs @ 70°F (18,370 kg. @ 21°C)		
CP3-36-ED-BKBL	36in, 3 channel, black base, blue cover	35,000 lbs @ 70°F (9,525 kg. @ 21°C)		
CP5-36-ED-BKBL	36in, 5 channel, black base, blue cover	50,000 lbs @ 70°F (18,370 kg. @ 21°C)		


Note: -ID = Industrial Duty, -ED = Extreme Duty

## Cable Fill Chart

Cord Type	Voltage	CP5-36-ID (1.25" Max Diameter)	CP5-36-ED (1.33" Max Diameter)	CP6-36-ED (2" Max Diameter)
SOOW Portable Cord	600V	2ga/4C	2ga/4C	2ga/5C
SOOW Control Cord	600V	12ga/20C, 14ga/24C, 16ga/44C	12ga, 20C	ALL
Type W Single Conductor	2000V	350 MCM	500 MCM	>500 MCM
Type W Multi-Conductor	2000V	2ga/2C, 4ga/4C, 6ga/5C	2ga/3C, 4ga/4C	3/0ga-4C, 4/0ga-3C
Type SC Single Conductor	600V	>4/0	>4/0	>4/0
Welding Single Conductor	600V	500 MCM	>500 MCM	>500 MCM
Type G Multi-Conductor	2000V	4ga/4C	4ga/4C	3/0ga/4C

## Accessories

Part Number	Description
CP-GRIPKIT	Accessory Kit, anti-slip grit tape for TuffTraxx®
TT-CART	Cart, transport and storage for TuffTraxx®, max capacity = 10 units

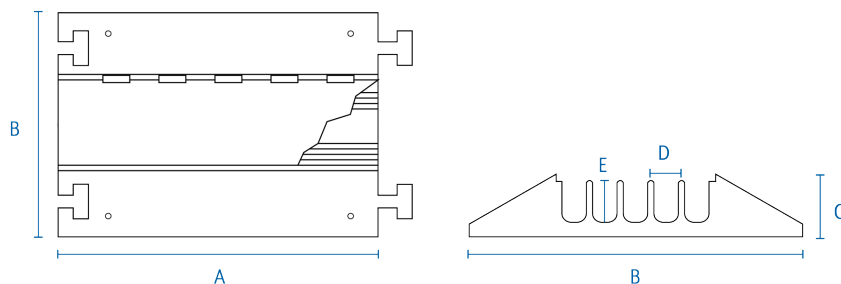

## Dimensions & Weights:

Part Number	Description	A-Length	B-Width	C-Height	D-Channel Width	E-Channel Height	Weight
CP5-36-ID	Industrial duty 5-slot	36" (91 cm.)	17.5" (44 cm.)	2.00" (5 cm.)	1.36" (5 cm.)	1.27" (5 cm.)	20.6 lbs. (9.3 kg.)
CP3-36-ED	Extreme duty 3-slot	36" (91 cm.)	20" (51 cm.)	3.05" (8 cm.)	2.22" (5 cm.)	2.25" (6 cm.)	28 lbs. (12.7 kg.)
CP5-36-ED	Extreme duty 5-slot	36" (91 cm.)	19.5" (50 cm.)	2.25" (6 cm.)	1.35" (3.5 cm.)	1.35" (3.5 cm.)	23.5 lbs. (10.7 kg.)
CP3-36-ED-BKBL	Extreme duty 3-slot	36" (91 cm.)	20" (51 cm.)	3.05" (8 cm.)	2.22" (5 cm.)	2.25" (6 cm.)	28 lbs. (12.7 kg.)
CP5-36-ID-BKBL	Extreme duty 5-slot	36" (91 cm.)	19.5" (50 cm.)	2.25" (6 cm.)	1.35" (3.5 cm.)	1.35" (3.5 cm.)	23.5 lbs. (10.7 kg.)

# Related Products:

Click on an image for more product information.



[4 Wheel e-Cart](#)



[1066FS](#)



[CDU 50-3R-A](#)



[NM3 50  
50 Amp, 125/250V](#)



[NM3  
100 Amp, 120/208V](#)



[CDU 20-30A  
NM Generator Boxes](#)



[QBS  
Quad Box Stringers](#)



[63ASO, 63BSO, & 63DSO](#)




[CAM Type Cordset](#)



[IEC Cordsets](#)



[S Hooks](#)



[W & Y  
Cordsets](#)



[Smart Monitor Cordset](#)



[Perma-Tite Cordset](#)



[Perma-Link  
1510-P, 1610-C](#)



[Perma-Tite  
IP69k Water Tight  
1510-PW6P, 1610-CW6P](#)



Ericson Manufacturing Company  
4323 Hamann Parkway  
Willoughby, OH 44094, USA



1-800-374-2766  
info@ericson.com  
L1000292K