

Perma-Link™ 50 Amp Devices

Portable Power



ERICSON
SAFETY IS OUR STANDARD


PERMA-LINK®



Standard Features:

- UL & CSA Listed
- Rugged nylon construction resists high impact and jobsite oils & chemicals
- Optional Sealing boots with sealing ring offer additional moisture, dust protection and UV protection
- Terminals have 5/16" screws with self locking Perma-Lock™ collar to encapture wire strands for secure terminations
- Internal self centering cord clamp for cables up to 1/2"
- Dual internal cord seal ensures dust and water resistance
- Rear beveled housing prevents cord snags when dragged
- Rugged nylon construction ensures long service life

Click or scan for more information.

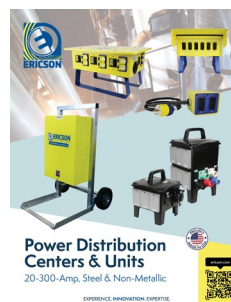

Power Distribution
Centers & Units
20-300-Amp, Steel & Non-Metallic



Factory
Assembled Cordsets
Solutions Guide



Unique Features:



Rugged Nylon
Construction for rugged
Jobsite environments



Rear beveled housing
prevents cord snags
when dragged



Dual internal cord seal
ensures dust and water
resistant cord entry



External husk with
grooves provides
secure grip

1.800.ERICSON

info@ericson.com

Selection Guide:

Face View	NEMA	Electrical Ratings		Perma-Link		Receptacles	Flanged Inlets	Inlet with Flip Cover
	Config	Amps	Volts	Plugs	Connectors			
Locking, 2-pole, 3-Wire Grounding								
	Non-Nema	50	250VDC,600VAC	3763-P	3762-C	3771	3777	-
Locking, 3-pole, 3-Wire Grounding								
	Non-Nema	50	250VDC,600VAC	3765-P	3764-C	3769	3775	-
	Non-Nema	50	250VDC,600VAC	7765-P(1)	7764-C(1)	7379	7958	-
Locking, California Style, 2-pole, 3-wire Grounding								
	Non-Nema	50	125	CS6361-P	CS6360-C	-	-	-
			250	CS8265-P	CS8264-C	CS8269	CS8275	
			480	CS8465-P	CS8464-C	CS8469	-	
Locking, California Style, 3-pole, 4-wire Grounding								
	Non-Nema	50	125/250	CS6365-P	CS6364-C	CS6369	CS6375	CS6375-F
			480,3ø	CS8165-P	CS8164-C	CS8169	CS8175	
			250,3ø	CS8365-P	CS8364-C	CS8369	CS8375	

- Notes:
1. For replacement use only, not recommended for new installations
 2. Contact factory for custom assemblies

Weatherproof Covers & Sealing Collar System


Our exclusive sealing collar system is available to provide maximum moisture protection between cordsets. The two boots are securely sealed together with threaded polycarbonate rings.

Perma-Link® 50-Amp Accessories	Catalog Number
Weatherproof boot for plugs or connectors	7717
Sealing Collar for weatherproof boots	510RR
Weatherproof receptacle cover	7788CR
Weatherproof receptacle cover (Black)	7788CR-BLK




Product Specifications:


Plug

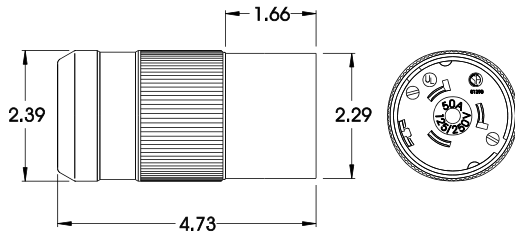


Connector

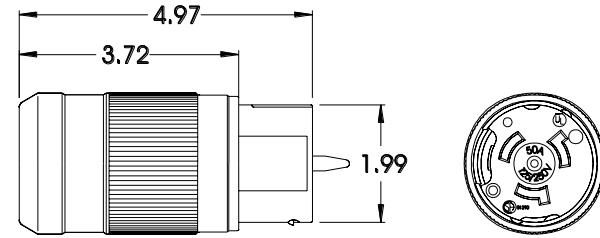

Receptacle

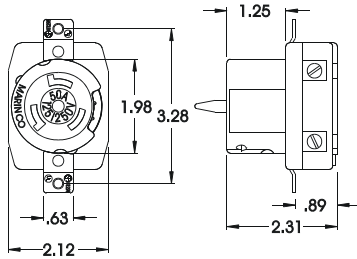

Inlet with Flip Cover

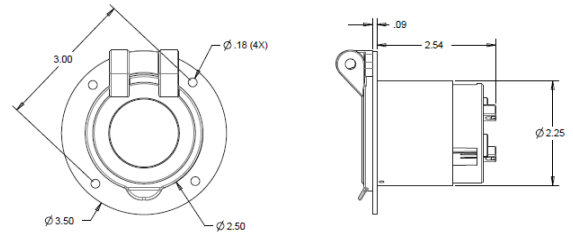

Related Products:

Click on an image or scan the QR code for more product information.

Learn More



Cordsets
[63ASO, 63BSO & 63DSO](#)



Pin & Sleeve
[Cordsets](#)



e-Cart



PDC
[Power Distribution Center](#)



1066-FS
[Power Distribution Units](#)
[Oscar® Series](#)



NM3 Series
[Non-Metallic Boxes](#)



Perma-Tite
[IP69k Water Tight](#)
[1510-PW6P, 1610-CW6P](#)



SmartMonitor
[AEGCP Compliant](#)
[1510-PW6PL, 1610-CW6PL](#)