


2600 Series Hazardous Location Handlamp

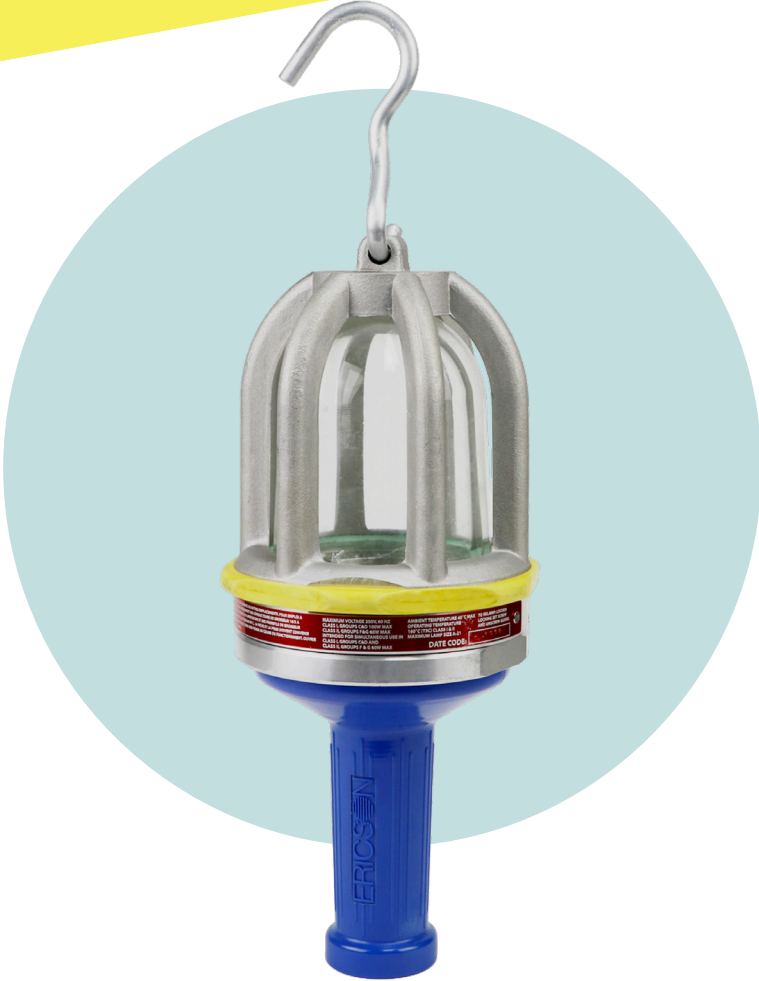

Standard Features:

- cETLus listed
- Class I & II Div 1 & 2, Groups C, D, F & G
- NEMA 4X Rated, and Wet location rated
- Copper-free, cast aluminum, anti-spark guard
- High-impact tempered borosilicate glass globe
- Heat, chemical and impact resistant, glass reinforced handle
- Cord restraint seal system provides flex and water resistance
- Accommodates #16/3 to #14/3 in various types of cord jackets
- Hand lamps are available in 25, 50 and 100 ft. cord lengths
- -20°C to 40°C Ambient

Applications:

- Waste / Water treatment
- Grain elevators
- Mining
- Oil refineries
- Coal Barns/Fuel storage
- Hazardous locations
- Aerospace
- Shipyards



1926-12A-LED-L
Inline Low Voltage Transformer Version




Unique Features:



Heavy duty, copper-free, cast aluminum guard.



Rubber bumper protects case.



Enclosed rated LED Lamp.



Non-conductive, high-impact glass reinforced handle.

Selection Guide:

Part Number	Electrical Rating	Wattage	Cord Length / Cord Type	Bulb Type	Plug	Low Voltage	LV Transformer
2600-LED*	120VAC	10 watts	None, Hand Lamp Only	LED	None	No	n/a
2600-LED-L*	12VAC	7.3 watts	None, Hand Lamp Only	LED	None	Yes	External
2625-LED*	120VAC	10 watts	25 ft. / #14/3 SOOW	LED	NEMA 5-15	No	n/a
2625-LED-L*	12VAC	7.3 watts	25 ft. / #14/3 SOOW	LED	NEMA 5-15	Yes	External
2625-LED-XP*	120VAC	10 watts	25 ft. / #14/3 SOOW	LED	Explosion Proof 5-15 Style	No	n/a
2650-LED*	120VAC	10 watts	50 ft. / #14/3 SOOW	LED	NEMA 5-15	No	n/a
2650-LED-L*	12VAC	7.3 watts	50 ft. / #14/3 SOOW	LED	NEMA 5-15	Yes	External
2650-LED-XP*	120VAC	10 watts	50 ft. / #14/3 SOOW	LED	Explosion Proof 5-15 Style	No	n/a
26100-LED*	120VAC	10 watts	100 ft. / #14/3 SOOW	LED	NEMA 5-15	No	n/a
26100-LED-L*	12VAC	7.3 watts	100 ft. / #14/3 SOOW	LED	NEMA 5-15	Yes	External
26100-LED-XP*	120VAC	10 watts	100 ft. / #14/3 SOOW	LED	Explosion Proof 5-15 Style	No	n/a
1926-12A-LED-L	120VAC	7.3 watts	25 ft. / #14/3 SOOW	LED	NEMA 5-15	Yes	Inline 30VA
1926-12B-LED-L	120VAC	7.3 watts	50 ft. / #14/3 SOOW	LED	NEMA 5-15	Yes	Inline 30VA

*cETLus listed.

Portable Low Voltage Transformers:

- Designed to meet NEC and OSHA Code Requirements for LV Lighting when used in Damp or Confined Space Applications
- Transformers, in corrosion resistant, impact resistant non-metallic enclosures, convert 120vac to 12vac for areas where 12v is required.
- Available in standard N5-15 receptacles or non-nema CF style for fixtures with dedicated 12vac lamps.
- Portable transformers are available with 2 and 4 receptacles providing 12vac power. Each Receptacle is individually overload protected.
- Portable Transformer is provided with standard N5-15, 120V Plug

Part Number	Description	Cord length	Plug	Transformer	Receptacles	Circuit Breakers
1940-12	Portable transformer	6' 14/3 SOW yellow	NEMA 5-15	120V to 12V 200VA	2 NEMA 5-15 (12V)	2 Push to Reset
1940-12CF	Portable transformer	6' 14/3 SOW yellow	NEMA 5-15	120V to 12V 200VA	2 Non NEMA Crows Foot	2 Push to Reset
1941-12	Portable transformer	6' 14/3 SOW yellow	NEMA 5-15	120V to 12V 400VA	4 NEMA 5-15 (12V)	4 Push to Reset
1941-12CF	Portable transformer	6' 14/3 SOW yellow	NEMA 5-15	120V to 12V 400VA	4 Non NEMA Crows Foot	4 Push to Reset
1941-12-C1D2*	XP Portable transformer	6' 14/3 SOW yellow	Explosion Proof N5-15 Style**	120V to 12V 400VA	4 Killark UGRP-20231F**	None

* cETLus Listed

**Other hazardous location, plug and receptacle configurations available.



1940-12



1941-12





1941-12- C1D2

2600 Series Replacement Parts:

Part Number	Replacement Part	Image Reference
2603	Handle	A
2604	Cord strain relief kit	B
2605	Replacement base & Socket assembly	C
2607	Hook	D
2610	Guard & Globe Assembly	E
SLBLED-60	11 watt 120VAC LED Lamp	F
SLBLED-12	7.3 watt 12VAC LED Lamp	F



Product Specifications:

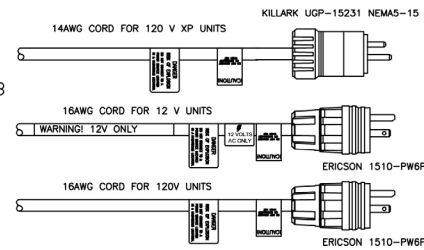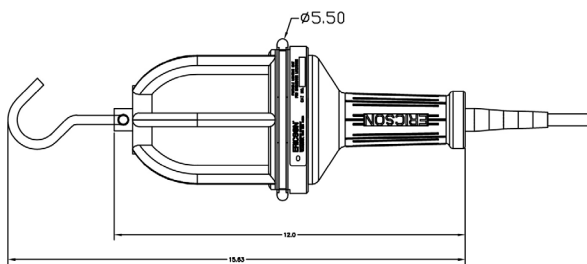

Related Products:




70N
Handlamp Series



SL HAZ
Class I, Div II Stringlight



1009
Class I, Div II,
Highbay/Flood

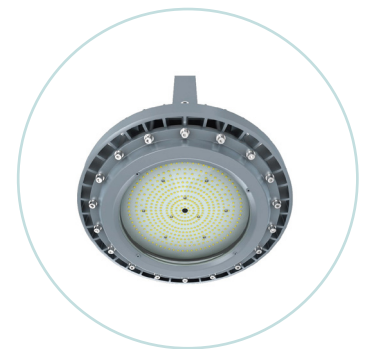

1007
Class I, Div I, Highbay



Ericson Manufacturing Company
4323 Hamann Parkway
Willoughby, OH 44094, USA



1-800-374-2766
info@ericson.com
L1000508C